



# **FAG Induction Heating Devices HEATER**

**Quality and Safety Redefined** 



## Quality and safety redefined!

With the new FAG induction heating devices from the HEATER series, Schaeffler is setting the highest standards in quality and safety.

To make the mounting of bearings and parts even easier and more efficient, all heating devices feature a number of innovative functions that are unique in this product class. And this at an excellent priceperformance ratio!

The outstanding performance was tested and certified by TÜV Rheinland.

#### **ADVANTAGES**

- + Easy operation and optimized mounting times
- + Very user friendly and cost efficient
- + Controlled heating in ramp control mode (combined temperature-time-mode)
- + Uniform heating of outer ring and inner ring
- + User is protected from magnetic field
- + Demagnetized, stress-relieved parts
- + Easy positioning of large bearings thanks to sliding table
- + High degree of flexibility as accessories include ledges of various sizes
- + Large scope of delivery
- + Ideal for batch mounting
- + Free warranty extension (5 instead of 3 years)
- + Maximum safety for user, heating device, part and machine











Five Year Warranty

#### **Applications**

FAG induction heating devices are ideal for heating


- bearings with a min. bore diameter of 10 mm and a max. outer diameter of 1500 mm.
- bearings with a max. weight of 1200 kg.
- other rotationally symmetric steel parts, such as labyrinth rings, gearwheels, belt pulleys, roll couplings, sleeves, etc.

#### Induction heating - principle

The heart of FAG induction heating devices is a current carrying coil. In all bench top devices, it is situated inside the HEATER housing (see graphic) and not – as in other devices – in the rolling bearing bore.

This position permits uniform, controlled heating. The risk of damaging the heating device or part is reduced significantly. While the part to be mounted is heated,

non-metallic parts and the device itself remain cool.



# FAG HEATER: Uniform, Stress-relieved Induction Heating

#### SCOPE OF DELIVERY

The scope of delivery of all devices includes (standard accessories): cover // ledges // gloves\* // grease









## **HEATER10**

Scope of delivery: standard accessories // optional: carrying case for mobile use

Handy, mobile device for heating small rolling bearings and other rotationally symmetric parts. Ideal for maintenance work, e.g. in cars and electric machines.

- parts of up to 10 kg
- min. bore diameter of 10 mm
- easy to operate
- weighs only 7 kg
- sturdy carrying case for mobile use





### **HEATER20**

Scope of delivery: standard accessories // optional: carrying case for mobile use

Mobile bench top heating device for small rotationally symmetric parts and rolling bearings.

- parts of up to 20 kg
- min. bore diameter of 10 mm
- easy to use
- weighs only 14 kg
- sturdy carrying case for mobile use





<sup>\*</sup> New gloves, even more heat resistant.

### **HEATER40**

Scope of delivery: standard accessories // incl. remote control

For professional mounting work in maintenance workshops and in the production sector. The slewing ledge makes the device easier to operate and simplifies the procedure.

- parts of up to 40 kg
- min. bore diameter of 15 mm
- for stationary use





Scope of delivery: standard accessories // incl. remote control

Stationary heating device with slewing ledge.

- parts of up to 150 kg
- min. bore diameter of 20 mm
- slewing ledge simplifies positioning of parts for heating process
- 400 Volt technology



### **HEATER300**

Scope of delivery: standard accessories // incl. remote control // optional: trolley

Bench top heating device for heating heavy parts in horizontal or vertical position. Available with a separate trolley for mobile use, with a tray for keeping ledges.

- parts of up to 300 kg
- min. bore diameter of 30 mm
- slewing ledge: simplifies positioning of parts for the heating process, saving time
- 400 Volt technology







# **HEATER600**

Scope of delivery: standard accessories // incl. remote control & sliding table

Sturdy, powerful standalone device for the expert mounting of heavy parts.

- parts of up to 600 kg
- min. bore diameter of 55 mm
- vertical ledge
- sliding table simplifies positioning of parts for the heating process
- 400 Volt technology







# FAG HEATER

### **Technical Data**







Heating devices	HEATER10	HEATER20	HEATER40
Power consumption max. [kVA]	2,3	3,6	3,6
Voltage/frequency [V/Hz]	230/50	230/50	230/50
Current [A]	10	16	16
Temperature display [°C]	50240	50240	50240
Weight [kg]	7	14	26
Length [mm]	240	345	340
Width [mm]	200	205	240
Height [mm]	255	230	295
Ledge(s) W x H x L [mm] included in scope of delivery	10 x 10 x 125	14 x 14 x 200 20 25 x 25 x 200 35 40 x 40 x 200 60	14 x 14 x 280 Ø 30 x 30 x 280 Ø 50 x 50 x 280 Ø
Clear width W [mm] Clear height H [mm]	65 100	120 100	180 160
Part weight max. [kg]	10	20	40
Accessory ledge(s) W x H x L [mm]	7 x 7 x 125 🐠	7 x 7 x 200 10 10 x 10 x 200 15 30 x 30 x 200 45	10 x 10 x 280

# **HEATER1200**

Scope of delivery: standard accessories // incl. remote control & sliding table

Sturdy, powerful standalone device with an all-steel construction for heating very large parts.

- parts of up to 1200 kg
- min. bore diameter of 95 mm
- outer diameter of up to 1500 mm
- sliding table simplifies mounting of parts for the heating process
- 400 Volt technology















HEATER150	HEATER300	HEATER600	HEATER1200
12,8	12,8	25	40
400/50	400/50	400/50	400/50
32	32	63	100
50240	50240	50240	50240
57	75	350	850
500	1045	1300	1660
290	310	820	1050
480	570	1080	1250
30 x 30 x 350 45 50 x 50 x 350 70 70 x 70 x 350 90	40 x 40 x 490 60 60 x 60 x 490 85 80 x 80 x 490 115	100 x 100 x 700 👀	150 x 150 x 850 💯
210 220	330 265	430 390	690 475
150	300	600	1200
14 x 14 x 350 20 20 x 20 x 350 30 40 x 40 x 350 30 60 x 60 x 350 35	20 x 20 x 490 30 30 x 30 x 490 45 50 x 50 x 490 70 70 x 70 x 490 100	30 x 30 x 700 55 40 x 40 x 700 65 50 x 50 x 700 80 60 x 60 x 700 95 70 x 70 x 700 100 80 x 80 x 700 125 90 x 90 x 700 40	60 x 60 x 850

## Select the right heating device easily and quickly

FAG Heating Manager is a software for determining the right FAG heating device for your specific application quickly and easily. The selection software can save you a lot of time and makes it easy to find the best solution.

FAG Heating Manager is suitable for everyone who wishes to heat a Schaeffler bearing and is looking for the right FAG heating device for the job. With the help of our bearing database, users can select a bearing

from the entire Schaeffler portfolio. Then the software determines the ideal heating device for that bearing using a special algorithm.


Particularly user-friendly: A list of results is created that includes not only the ideal heating device but also a number of alternatives.

Alternative devices means

- that this heating devices can also be used for the selected bearing.
- but that possible limitations can occur, e.g. a longer heating time.

These alternatives are helpful to customers who – for example – already own an FAG heating device and are wondering whether it can also be used for their application in hand.

FAG Heating Manager is available in German and English and can be downloaded for free from the Media Library on www.schaeffler.com

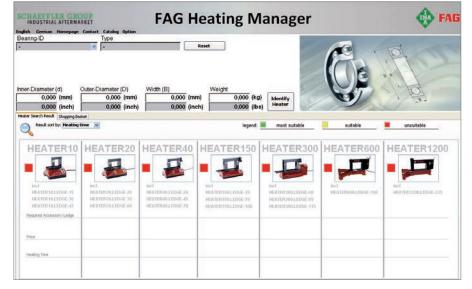



#### Schaeffler Australia Pty Ltd

Level 1, Bldg 8 Forest Central Business Park 49 Frenchs Forest Road Frenchs Forest, NSW 2086 Australia

Internet www.schaeffler.com.au
E-mail sales.au@schaeffler.com
Phone +61 2 8977 1000
Fax +61 2 9452 4242

#### Schaeffler New Zealand

(Unit R, Cain Commercial Centre)
20 Cain Road
1135 Penrose
New Zealand
Internet www.schaeffler.co.nz

E-mail sales.nz@schaeffler.com Phone +64 9 583 1280 Fax +64 9 583 1288 Every care has been taken to ensure the correctness of the information contained in this publication but no liability can be accepted for any errors or omissions. We reserve the right to make technical changes. © Schaeffler Technologies AG & Co. KG Issued: 2012, July
This publication or parts thereof may not

This publication or parts thereof may not be reproduced without our permission.